



Water Saving

### FEATURES

- 3.0L/4.5L dual flush design.
- Low water tank, suitable for highly restricted area, mounting panel can be operated on the front or above.
- Fast loading design for tank fittings and panel, more easy for installation and maintenance.

### SPECIFICS

Nominal water consumption: 3.5L

Dual Flush Volume: 3.0L/4.5L


Water Inlet Requirement: 0.05MPa (Dynamic Pressure) ~0.75MPa (Static Pressure)

Water Efficiency Grade: Grade 1

### Others

Recommend fittings:  
 Tank Panel: MB170Series/  
 MB174Series/MB176G/  
 MB171M/MB175M  
 Toilet: CW522B

### WH143B-522B/WH143B-542B/WH143B-822B Concealed Flush Tank

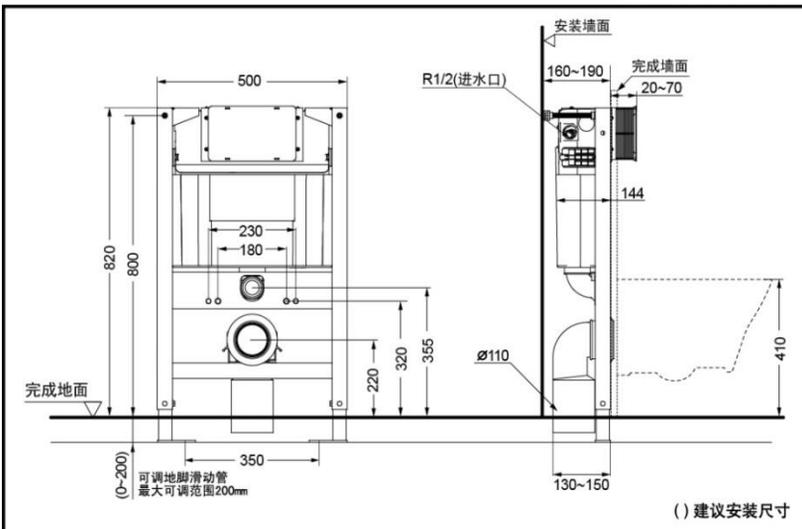

\*TOTO(CHINA) CO.,LTD. All rights reserved.