




TLK07001B



TLK01101BA (For 1Spouts)



TLK01102BA (For 2Spouts)



TLK01103BA (For 3Spouts)

**Functional Part
(Tank included)**

TLK01101BA

TLK01102BA

TLK01103BA

FEATURES

- Only 1.2 g of soap can make enough fine foam, less foam dripping.
- The spout prevents soap splashing, so it is comfortable and safe to use.
- The material is durable .


SPECIFIECS

Detection range 130~200mm
 Soap Volume : 1.2g
 Tank Capacity : ≈3L
 Power : AC100~240V
 Operating temperature : 1~40°C
 Suitable for soap viscosity : 1~17mPa•s

OTHERS


Recommend fittings :
 TLE24001B , TLE26001B ,
 TLE27001B , TLE28001B.

TLK07001B+TLK01101BA Automatic Soap Dispenser (AC)

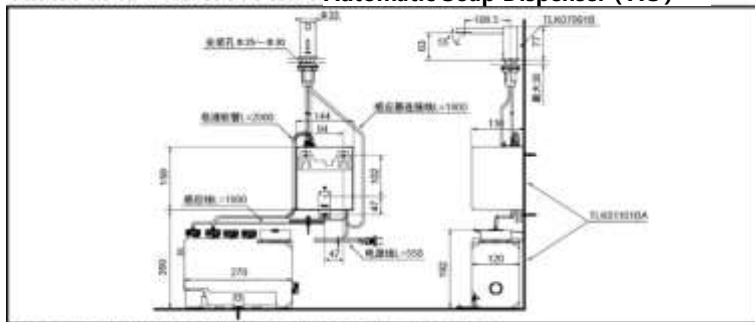


TOTO(CHINA) CO.,LTD. All rights reserved.

TLK07001B+TLK01102BA Automatic Soap Dispenser (AC)

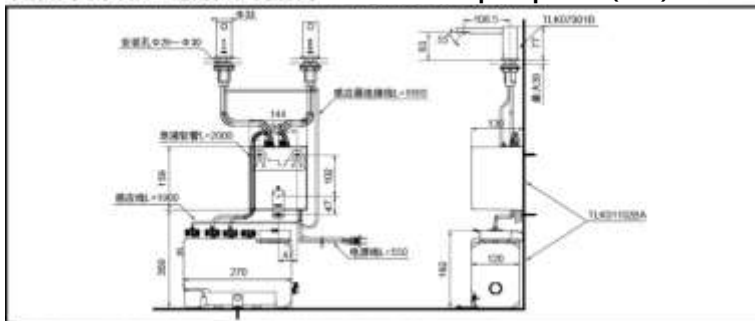

TOTO(CHINA) CO.,LTD. All rights reserved.

TLK07001B+TLK01103BA Automatic Soap Dispenser (AC)

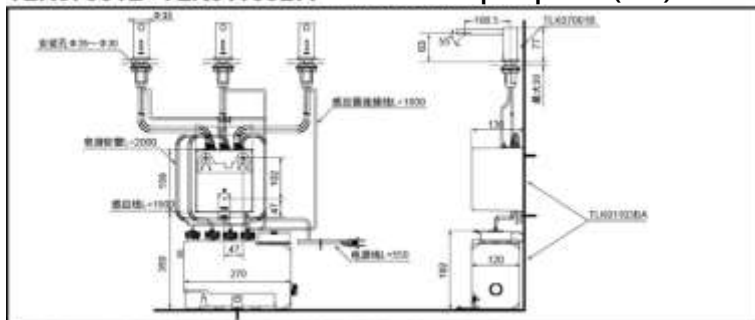

TOTO(CHINA) CO.,LTD. All rights reserved.