


**Functional Part
(Tank included)**
TLK01101BA
TLK01102BA
TLK01103BA



TLK08001B



TLK01101BA (For 1Spout)



TLK01102BA (For 2Spout)



TLK01103BA (For 3Spout)

FEATURES

- Only 1.2 g of soap can make enough fine foam, less foam dripping.
- The spout prevents soap splashing, so it is comfortable and safe to use.
- The material is durable .


SPECIFIECS

Detection range 130~200mm
 Soap Volume : 1.2g
 Tank Capacity : ≈3L
 Power : AC100~240V
 Operating temperature : 1~40°C
 Suitable for soap viscosity : 1~17mPa•s

OTHERS


Recommend fittings :
 TLE23001B , TLE25001B.

TLK08001B+TLK01101BA Automatic Soap Dispenser (AC)

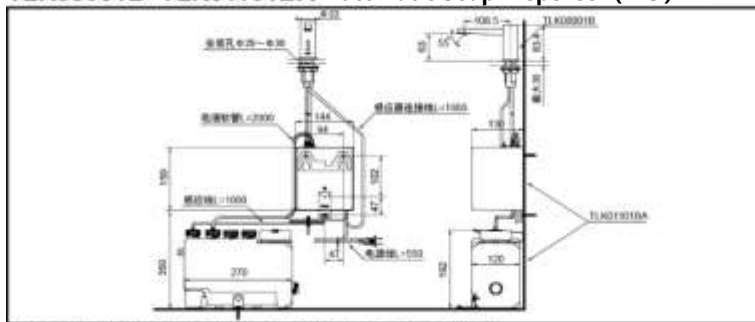


TOTO(CHINA) CO.,LTD. All rights reserved.

TLK08001B+TLK01102BA Automatic Soap Dispenser (AC)

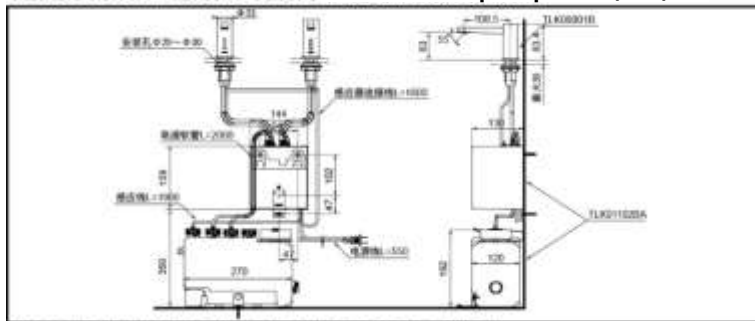

TOTO(CHINA) CO.,LTD. All rights reserved.

TLK08001B+TLK01103BA Automatic Soap Dispenser (AC)

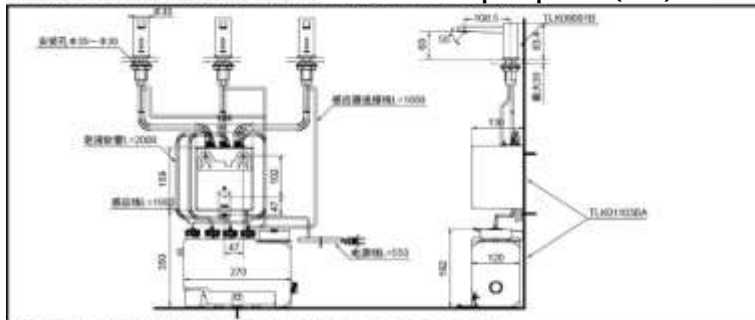

TOTO(CHINA) CO.,LTD. All rights reserved.