



FEATURES

- 3.0L/4.5L flushing system, low consumption.



Cefiontect

Tornado Flushing


Reduce The Water

Rimless

SPECIFICS

Size: 701x387x699mm
 Water Inlet Requirement:
 0.05MPa(Dynamic Pressure)
 ~0.75MPa(Static Pressure)
 Nominal water consumption:
 3.5L
 Dual Flush Volume:3.0L/4.5L
 Water efficiency grade:
 Grade 1
 Flush type: Washdown
 Drainage mode:
 Underneath Drainage
 Rough-in:
 CW987SEBT305 : 305mm
 CW987SEBT400 : 400mm

CW987SEBT305/CW987SEBT400 One-piece Toilet

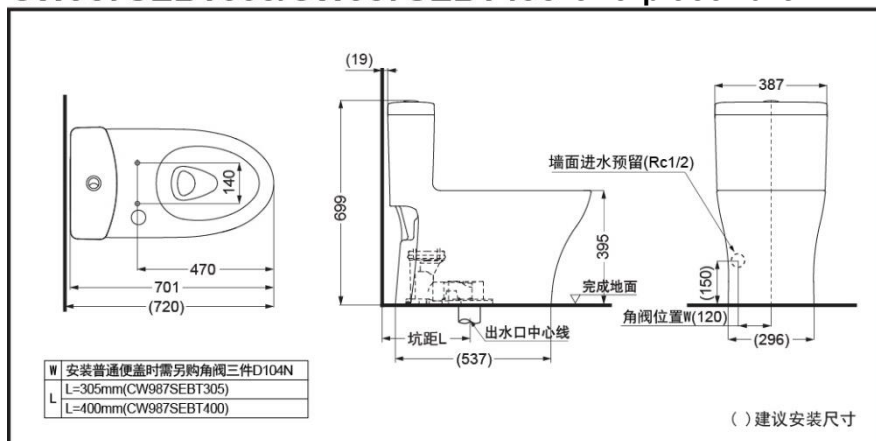

OTHERS

Recommend fittings :
 TC400CVK-1; TC401CVK-1.
 Waslet: S7series; S5series.
 Toilet installation 3 pieces kit:
 D106A